




■ CONTENTS ■ CONTENU



■ EXTERNAL DIMENSIONS ■ DIMENSIONS EXTERNES

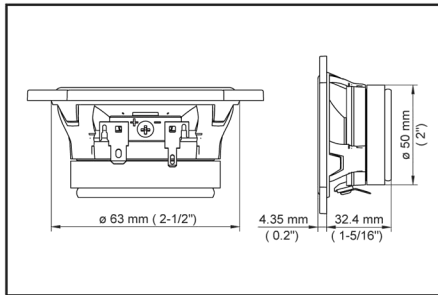


■ CONNECTION ■ CONNEXION



■ SPECIFICATIONS ■ SPÉCIFICATIONS

- POWER HANDLING: 50W RMS / 150W PEAK
- NOMINAL IMPEDANCE: 6Ω
- SENSITIVITY: 84dB @ 1W/1m
- FREQUENCY RESPONSE: 100Hz to 20kHz
- RESONANT FREQUENCY: 125Hz
- CROSSOVER RECOMMENDATION: BP FILTER
 - LOW=250Hz@-12dB/OCT
 - HIGH=2.4kHz@-12dB/OCT
- CUTOFF DIAMETER: 2-1/2" (6.3cm)
- MOUNTING DEPTH: 1-5/16" (3.3cm)

Frequency Response Graph



30MC

1 PAIR



MADE IN CHINA FABRIQUE EN CHINE

DESIGNED IN USA

CONÇU AUX ETATS-UNIS