


## RGBHON / RGBHON+ Installation Instructions


### Illustration A

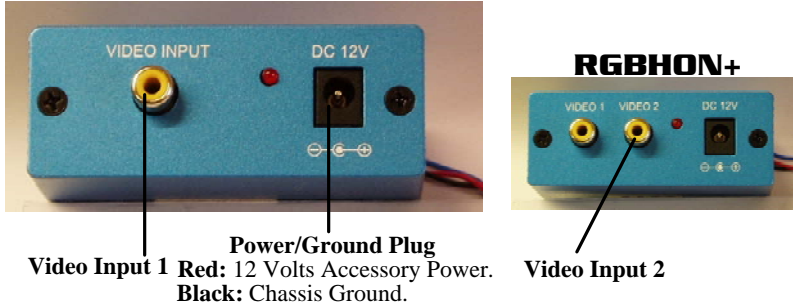

Attached toggle switch: to toggle from Nav. / Video Input 1. Do Not Apply Power To These Wires!

**Blue Wire:** Positive trigger for video 1 on RGBHON, Positive trigger for Video 2 on RGBHON+

### Illustration B

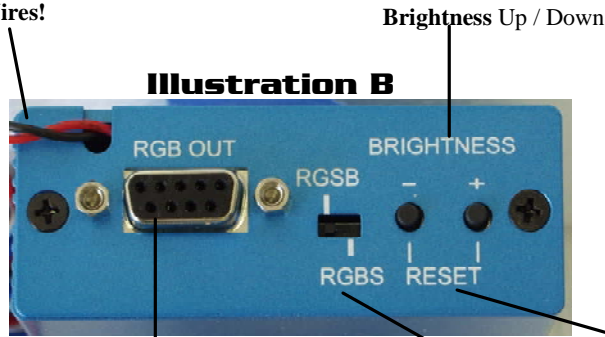

1. **Red wire** must have accessory power. This is not a trigger for video input 1. This is main power for the unit since it is digital. Connect this straight from the ignition harness whenever possible

2. **Black wire** must have chassis ground.

3. **Blue wire** is positive trigger 12v for video input 1 for RGBHON, Positive trigger for video 2 on RGBHON+. You may leave the attached toggle switch off and connect this wire directly to the reverse lights for automatic turn-on in reverse.



**Brightness Reset-** press both simultaneously to reset to default

**RGBs(4-wire setup) / RGBB(3-wire setup) selector (keep this switch in the RGBS position.)**

*Before*



*After*

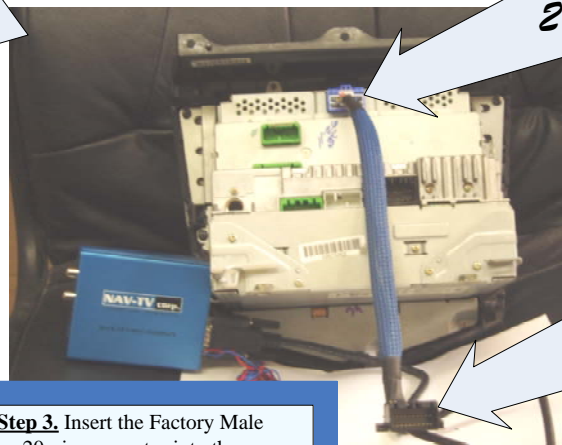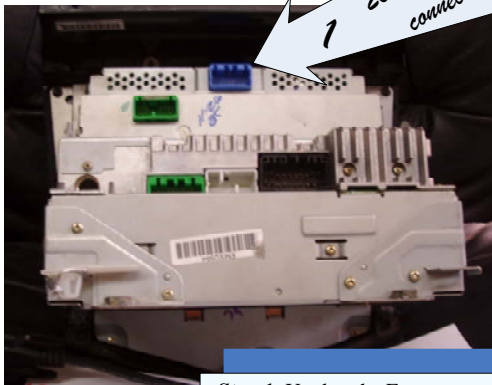

**Step 1.** Unplug the Factory 20-pin connector from the back of the Headunit.

**Step 2.** Insert the Male 20-pin plug of the RGBHON into the back of the Headunit.

**Step 3.** Insert the Factory Male 20-pin connector into the Female RGBHON(+) connector.

**Note: RGBHON(+) MUST only be plugged into the back of the Headunit**

*Easy as 1 2 3*