

## MOUNTING INSTRUCTIONS

There are two mounting options for the BMC.

### A) Surface Mount


### B) Flush Mount

### A) Surface Mount:

- Find a suitable mounting location for the BMC.
- Clean surface with alcohol or similar cleaner.
- Peel double stick tape & adhere to back of BMC then adhere it to mounting location

### B) Flush Mount:

- Find a suitable mounting location for the BMC.
- Ensure you have at least 1 inch of clearance on the back side of your selected mounting location.
- With a 3" hole saw, drill a hole in your selected location.
- Insert the mounting cup. Attach retention clip with allen screw.
- Run cable through the mounting cup and snap BMC in to the cup.

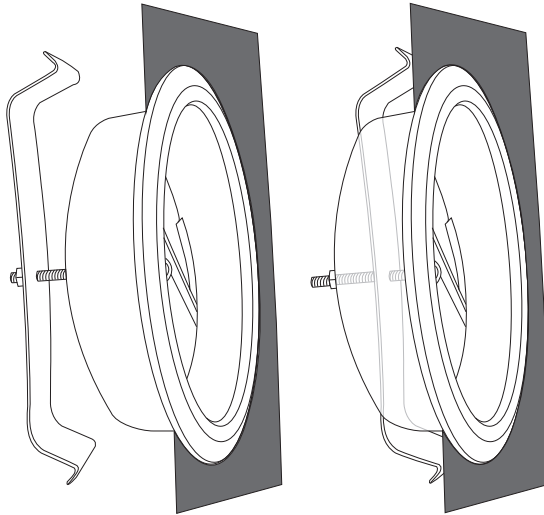

## WIRING INSTRUCTIONS

Red – 12volt accessory

Blue RCA – Right Audio signal to Amplifier


Black – Ground

Black RCA – Left Audio signal to Amplifier

Blue – Amplifier turn on



# Installation and User Guide

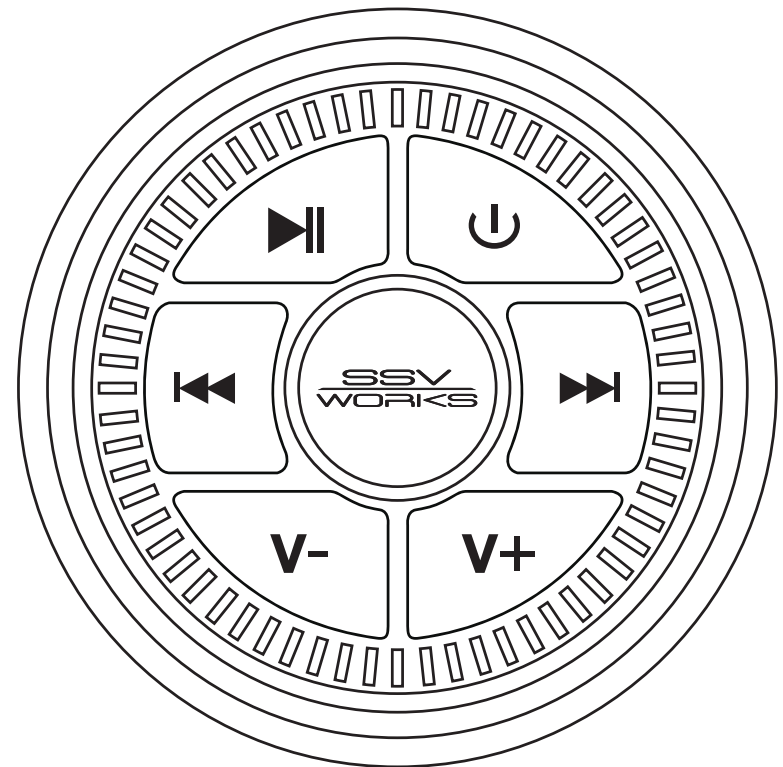

Corporate: SSV WORKS, 201 N. Rice Ave Unit A, Oxnard, CA 93030  
Web: [www.SSVworks.com](http://www.SSVworks.com) | Phone: 818-991-1778 | Fax: 866-293-6751

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by SSV Works is under license. © 2017 SSV Works, Oxnard, CA 93030 BMC Rev. D 4-10-17

**BMC**  
Bluetooth® Media Controller

## SAFETY INFORMATION

Do not attempt to disassemble or repair the BMC yourself. Please call SSV Works for technical assistance or repair information. Changes or modifications to the BMC not authorized by SSV Works will void the warranty.



**SSV Works recommends disconnecting the negative battery terminal before beginning any installation.**

## KIT INCLUDES

- Bluetooth Media Controller
- Machine Screw
- Mounting Cup
- Allen Wrench
- Retention Clip
- Double Sided Stick Tape Pad

## TOOLS NEEDED

- 3" Hole Saw (for flush mount installation only)
- Wire Strippers
- Wire Crimpers

## BLUETOOTH® PAIRING


1. Open the Bluetooth® setup program on the mobile device and activate the Bluetooth feature.
2. Turn on BMC using the power button (Center LED will have 2 quick blinks then pause)
3. Press the power button again and the center LED will blink rapidly.
4. The device will show up as “SSVworks BMC”. Select this device.
5. The center LED will go solid to indicate pairing is complete.

6. The SSV Works BMC was designed to default to maximum volume when turned on. This is so the paired device can be used as the master volume control.

If the BMC will be used as the master volume control, the volume on the paired device should be set to 90%, then any volume adjustment can be done on the BMC.

**Note: A previously paired Bluetooth® mobile device will automatically connect to the BMC when unit is turned on (if it is within range).**

## BUTTON LOCATIONS AND FUNCTIONS

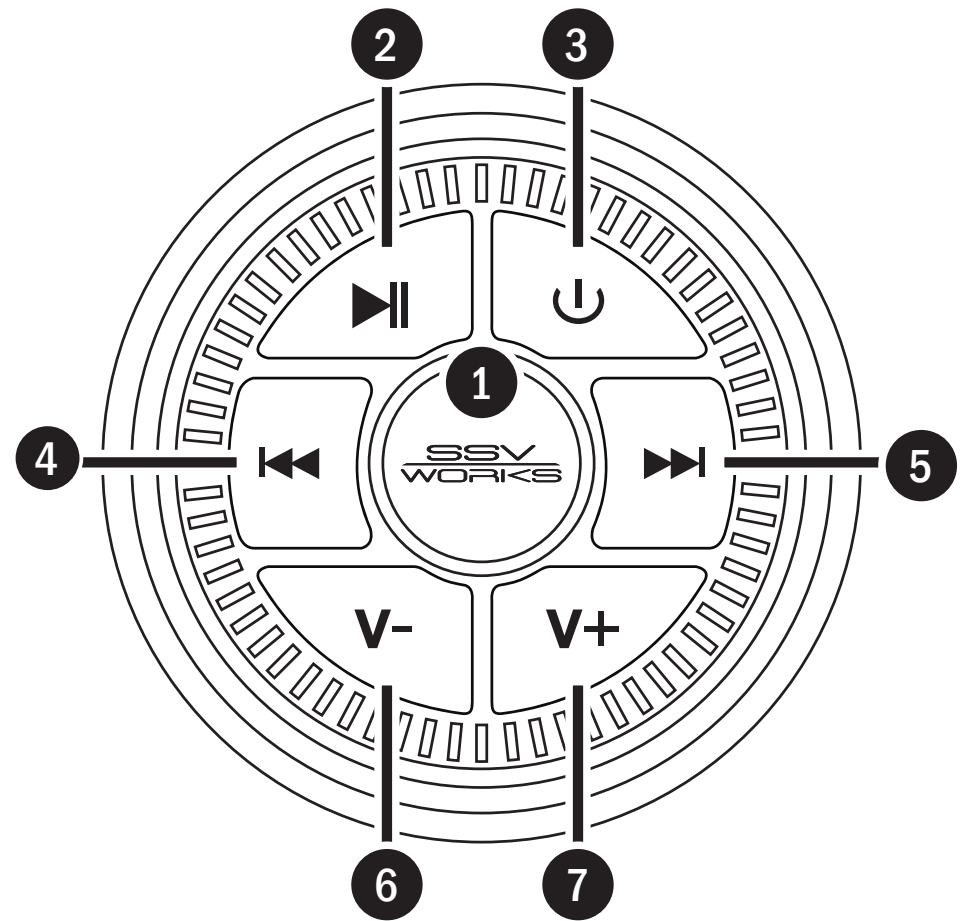

- 1. Center logo LED Indicator**
  - Fast Blinking – Discoverable Mode
  - 2 Quick blinks – Looking for Paired device
  - Solid on – Device paired and ready for use
- 2. Play/Pause Button**
- 3. Power Button** – Press and hold for 2 seconds to turn on.
- 4. Track Back Button**
  - Quick press to go to Previous track
- 5. Track Forward Button**
  - Quick press to go to Next track
- 6. Volume Down Button**
- 7. Volume Up Button**