

HANDS-FREE BLUETOOTH INTERFACE FOR SELECT 2006-UP ACURA/HONDA VEHICLES

APPLICATION GUIDE

ACURA

2006-09 MDX 2006-09 RDX

2006-09 RL

2006-08 TSX

2006-08 TL

HONDA

2006-09 ACCORD

2006-09 CIVIC

2006-09 CRV

2006-09 ELEMENT

2006-09 FIT

2006-09 ODYSSEY

2006-09 PILOT

2006-09 RIDGELINE

2006-09 S2000

QUICK START

STEP [1]

INSTALL

Using the BFHAHB harness, install the BFHA interface into your vehicle. Contact Scosche Tech Support for your specific vehicle disassembly.

STEP 2

POWER THE MODULE

With the unit installed, turn the ignition key to the on position to place the Bluefusion module into pairing mode. Press your radios designated XM button to enter the XM (Bluefusion) source. From the XM source press the preset number 6 button, the screen displays "Bluefusion" when ready.

STEP (3)

PAIR YOUR CELLULAR PHONE

Set your cellular phone into pairing mode and search for a new Bluetooth device (See your phone's owners manual for instructions). Once your cellular phone has searched for a new device, select "BLUEFUSION" from the list of devices found. If prompted for a pass code enter "0000".

STEP 4

NAVIGATE AND ENJOY

Once the two devices have connected and paired, you will be able to scroll through the menu functions of the BFHA. (See page 2-4 for Bluefusion operation).



IMPORTANT!


DO NOT RETURN PRODUCT TO THE RETAILER

IF YOU NEED ASSISTANCE OR REPLACEMENT PARTS
CALL US TOLL FREE: 1-800-621-3695 X3
HOURS MON-FRI 8AM-5:30PM (PST) SATURDAY 8AM-2PM (PST)

©2009 SCOSCHE INDUSTRIES, INC.


SI 06/09 BFHA (3000000)

INSTALLATION OVERVIEW

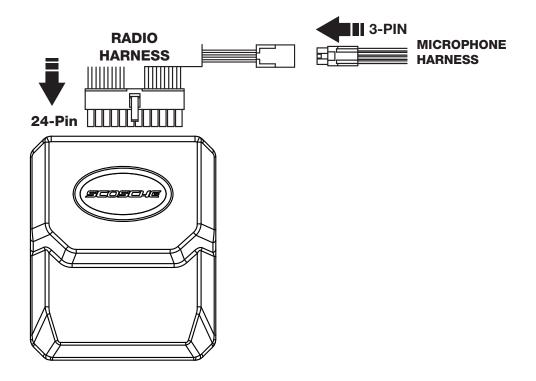

PAIRING YOUR MOBILE PHONE

- 1. Turn the key to the on position (II) to place Bluefusion into pairing mode.
- 2. Press the appropriate button to get to your XM source, then press and hold the preset number 6 to enter Bluefusion, screen displays "BLUEFUSION".
- 3. On your cellular phone, enter your Bluetooth menu and make your cellular phone search for a new bluetooth device. The device name will be "BLUEFUSION" and if you are prompted for a pass code enter "0000".
- 4. When the two devices are paired to each other, be sure to set the Bluefusion as a trusted device on your cellular phone.



NOTE: When the ignition is turned off the call will automatically transfer to the headset.

NOTE: When a phone call is active and you are re-entering the vehicle, the call will not automatically transfer to Bluefusion. Active calls will remain on the cell phone untill the next active phone call.

These notes are assuming the cellular phone's bluetooth feature is set to "ON".

SWITCHING RADIO SOURCES

While using other sources other than XM (Bluefusion) the interface will automatically switch to the XM source when you have an incoming phone call. The radio switches through the sources to find the XM source on the radio, some audio may bleed through while switching sources.

When a phone call is ended your radio will not automatically switch back to the original source you were previously on, this feature only works when previously on XM source. At this time we recommend switching back to the original source you were previously on.

RADIO OPERATION

RADIO CONTROLS MAY VARY.


There are different buttons used for each of the individual radios. Please read and understand this entire manual before operating the interface.

THIS CHART IS TO BE USED FOR ALL RADIO STYLES BELOW.


PRESSET NUMBERS FUNCTION THE SAME FOR RADIOS LISTED BELOW.

P = PRESET NUMBER				
	Р	FUNCTION		
	1	SELECT/ ANSWER		
	2	7 (O 11 (7 (1 E V O 10 E B)) (E		
	4	END/ CANCEL/ IGNORE		
	6	TOGGLE XM/ BLUEFUSION		


RADIO STYLE #1

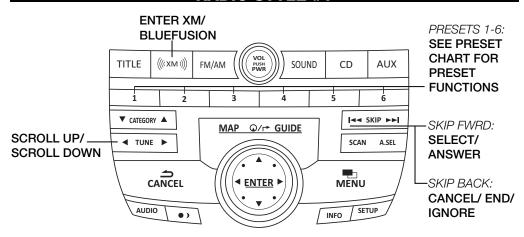

RADIO STYLE #2

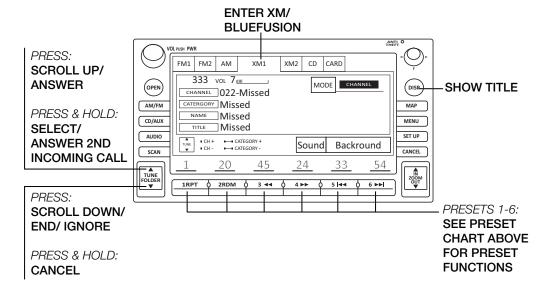

RADIO STYLE #3

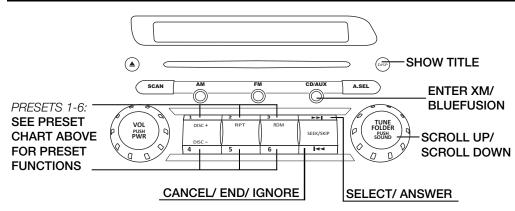

TRANSMITTING MUSIC USING BLUETOOTH

IN ORDER FOR THIS FUNCTION TO WORK A CELLULAR PHONE MUST BE PAIRED AND CONNECTED


When listening to audio from a stereo Bluetooth receiver the audio will be interrupted (not paused) when a phone call comes in.


Controlling your stereo Bluetooth transmitter via AVRCP: Play/ Pause - Not functional through the radio control.

(Use the controls on your external device).

Track Forward – Press the Seek Forward button. Track Back - Press the Seek Back button.

USING THE STEERING WHEEL CONTROLS					
USE THE CHART	BELOW FOR SW#1 ONLY. (SEE ILLO BELOW FOR SW#2)				
ANSWER/2ND CALL	PRESS THE CHANNEL BUTTON. (SEE ILLO BELOW FOR SW#2)				
END/IGNORE	PRESS AND HOLD THE CHANNEL BUTTON. (SEE ILLO BELOW FOR SW#2)				
TRACK FOWARD	PRESS THE CHANNEL BUTTON. (SEE ILLO BELOW FOR SW#2)				
TRACK BACK	PRESS AND HOLD THE CHANNEL BUTTON. (SEE ILLO BELOW FOR SW#2)				

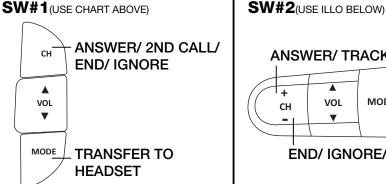



The **MODE** button will always route your conversation back to the cellular phone. also known as privacy mode (ex. when exiting the vehicle).


TROUBLE SHOOTING				
NO AVRCP CONTROL	Verify that the paired device supports AVRCP functionality.			
RANGE ISSUE	Bluetooth standard range maxing out at 30 feet, may vary due to environment.			
DEVICE NOT FOUND	Delete all previous pairing attempts and try again.			
BAD CALL QUALITY	Make sure the cellular is within range of the module (30ft.). Make sure the signal reception of the cellular phone is strong.			
NO SOUND	Make sure the module is on and paired to transmitting device. Make sure the volume is correct, check both the radio and the transmitting device, and other items within range.			
AUDIO DROP OUTS	Make sure the transmitting device is at a good battery state. If the item in on low battery, please recharge.			


NOTE: Due to every phone having different software and functionality features, many phones may work different with the Bluetooth module of the BFHA. We recommend contacting the Scosche Technical Support at 1-800-621-3695 Ex.3 with any common or reoccurring issues.

LIMITED

Scosche Industries Inc. warrants this product to be free from defects in material and workmanship for a period of 90 days from purchase. This Scosche product is sold with the understanding that the purchaser has independently determined the suitability of this product. This warranty is offered to the original purchaser of the product only. This warranty does not cover the product if physically damaged, subject to negligence or misuse, alteration, accident, or an act of GOD. This warranty does not apply to product which has water or physically damaged by accident or which has been misused, disassembled or altered.

The original dated sales slip or proof of purchase will establish warranty eligibility. If the product should prove defective within the warranty period, return the product with proof of purchase to Scosche Industries Inc. Scosche, at its option, will replace or repair the product free of charge and return the product postage paid. In no event shall Scosche Industries, Inc. be responsible for claims beyond the replacement value of the defective product, or in any way be liable or responsible for consequential or incidental damages. No express warranties and no implied warranties, whether for fitness or any particular use or otherwise, except as set forth above (which is made expressly in lieu of all other warranties) shall apply to products sold by Scosche. Scosche Industries cannot be held responsible for discrepancies/inconsistencies that may occur due to automotive manufacturing changes or option.

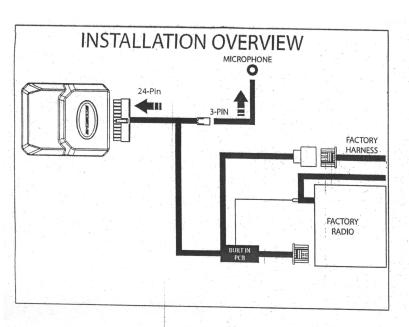

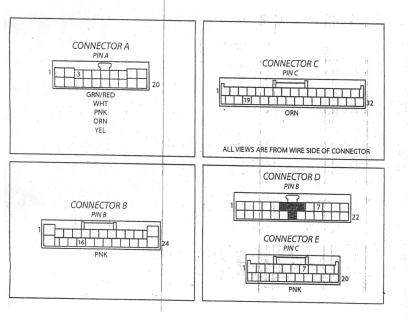

SCOSCHE

BFHAH

INSTALLATION

Tech Tip: When mounting the BFHA make sure to be clear of all moving mechanical device that may hit or damage the interface. Keep away from any hot surface areas like heater ducts direct sun light and metal surface areas that have the potential of getting hot.

BFHA INTERFACE INSTALLATION

- 1. Remove radio
- 2. Insert Scosche "T" harness into radio and factory harness
- 3. locate Steering Wheel Control information from the list on reverse page
- 4. Use supplied T-Tap to tap SWC wire then connect to appropriate T-harness SWC wire.

 5. If SWC wire is not present, insert supplied terminated cable into the the SWC wire's location then connect to appropriate T-harness SWC wire.

 6.Plug 24pin plug into Bluefusion interface.

BFHA MICROPHONE INSTALLATION

- 1. Attach the microphone on the headliner above the rear view mirror.
 2. Route the microphone cable through the headliner and "A" pillar to the interface location.
 3. Plug in the 3-pin molex connector to the pigtail on the Socshe "T harness.




HOURS MON-FREHAM-5:30 (PSF) SATURDAY BAM-2PM (PSF) CALL US TOTAL FREE 1-800-621-3695 X3

REV.1

	YEAR	MVAKES	Moinalie	::-'@N\;∞	IF
	2003-07	HONDA	ACCORD	A	
į	20101:1-10(9)	EURODINIDIA :	AVECORID).		
	2006-09	HONDA	CIVIC	D,E	
	2006 (09)	HIGINIBIAL	RIDGELIN	Tie A De l	
	2005-06	HONDA	CRV	A	11
1	220074-019	HONDA	CONTRACTOR	to to the cores	
	2003-09	HONDA	ELEMENT	A	
	2005-08	HOMBA	ODYSSEY	A SAN DELLA	
1000	2009	HONDA	ODYSSEY	D,E	Н
100	2006-08	HONDAN	MELIOTINE	A SALES	
	2009	HONDA	PILOT	P.	П
	2(0)07/-(08)	HONDAY			
	2009	HONDA	FIT	B	11
	2004-09			D Determinant	П
	2004-08	HONDA	52000 FF		
	2005-06	ACURA	TSX	A	П
1	TO THE REAL PROPERTY.	> AQUIRA	(MDXC	A CONTRACTOR	
	2007-08	ACURA	MDX	С	
	2007 08	ACURA	anex :	I IIC	
	2005-08	ACURA	RL	Α	
	2004-03	ACURA	alle - Leu	A	П
					П
-	NO	TE: WIRE	COLORS MA	YVARY	

FROM THOSE LISTED






SWC INSTALLATION PROCESS


2003-07	HONDA	ACCORD	A A
elation (call)	HUNDA	ACCORD	
2006-09	HONDA	CIVIC	. D,E
elejary aleje	riterales.	र माहित्वहासार	
2005-06	HONDA	CRV	A.
NULL PROPERTY.	าร์เจรางว่า	TOWN THE	
2003-09	HONDA	ELEMENT	A
र्थक्षान हुए।	fafalaley.	(Oloyer-Rays)	er chrom
2009	HONDA	ODYSSEY	D,E
unas (ette	SEED MARK	and the contraction of	74
2009	HONDA	PILOT	В
el : [8 × . [9]; [1]	jajajajakt.	alight selection	
2009	HONDA	FIT	В
Ziolot e (g) «	al total purch	September 3	
2004-08	ACURA	TSX	. A
Marie Viel	SARCOLLEAS.	ONDER PROS	Swill see
2007-08	ACURA	MDX	C
March College	of telefities		
2005-08	ACURA	RL	A
Malating size	्रिक्ट स्टब्स्ट स्टब्स		


FROM THOSE LISTED

 Determine from the list which connector drawing to reference.
 In this case we are in an 09 Accord which is listed as connector B.




2) Find the Steering Wheel Control pin location shown in the connector drawing (as written in the connector drawing, all views are from wire side of connector) As shown, SWC wire in connector B is pin 16.





- If this pin location is already populated simply T-tap and connect to the brown wire marked "SWC" (purple wire marked "Pilot SWC" in case of the Pilot) and skip to step 7.
- 4) If the pin location IS NOT populated then reference the connector drawing to determine which of the supplied pinned wires to use.


 In this case we are going to use pin B with the orange wire.





- You are now ready to plug in the T-Harness assembly and the BlueFusion interface module.
- 8) To test, start vehicle and follow Quick Start Guide to pair your phone. Once phone is paired, switch radio to FM source and make an outgoing call. If radio switches sources to BlueFusion all connections are correct.

- 5) Lift the retainer clip on the connector and insert the supplied pinned wire into the pin location determined instep 2 (note the orientation to the connectors clip listed in the pin drawing).
- 6) Connect the supplied pinned wire (which is now inserted into the connector) to the brown wire marked "SWC" (purple wire marked "Pilot SWC" in case of the Pilot).



IMPORTANT

IF YOU NEED ASSISTANCE OR

REPLACEMENT PARTS

MOURS MON FILLBAM 5.30 (PST) SATURDAY BAM-2PM (PST)

> CALL US TOLL FREE 1-800-621-3695 X3

REV.1



Q U I C K S T A R T

STEP 1 - PAIR YOUR PHONE

- 1. Turn on your vehicle and enable Bluetooth on your cell phone.
- 2. Select "BlueFusion" and Enter Passcode: 0000

STEP 2 - ACCESSING BlueFusion

- 1. Press the XM or CD/AUX button to access the SATELLITE RADIO mode of your stereo.
- 2. Now push PRESET BUTTON #6 (if you do not have SAT RADIO or SAT TUNER installed, skip this step)
- 3. "BlueFusion" will be displayed on radio screen or display.

STEP 3 - HANDLING CALLS- ANSWER, END, IGNORE

- 1. To ANSWER a call press the CHANNEL UP (CH+) button on your steering wheel or stereo to ANSWER the call. If answering from a Stereo Button use PRESET #1
- To END the call, press the CHANNEL DOWN (CH-) button. If ending from a Stereo
 Button use PRESET #4
- 3. To IGNORE an incoming phone call, press the CHANNEL DOWN (CH-) button while ringing. If Ignore call from a Stereo Button use PRESET #4

BlueFusion MENUS

MISSED CALLS: BlueFusion keeps a log of unanswered and ignored calls.

IMCOMING CALLS: Easily access phone numbers from calls you received.

OUTGOING CALLS: Easily access outgoing numbers dialed from your phone.

REDIAL: Redials the last number dialed.

VOICE DIAL: BlueFusion will trigger the voice dial function of your phone.







Bluetooth Handsfree Cellular and Streaming Music to a factory Honda Stereo

Scosche is pleased to bring you BlueFusion, the ultimate handsfree Bluetooth® car kit. BlueFusion seamlessly integrates your Bluetooth® enabled cellphone or streaming music device into the factory audio system of your vehicle.



HANDSFREE CELLULAR

BlueFusion will automatically mute your music in any source as a call comes in, simply press the answer/hang up on the radio or steering wheel to answer the call. The high fidelity microphone and advanced DSP noise cancellation software ensures a crystal clear conversation even in noisy vehicles.



STREAMING MUSIC

BlueFusion supports
streaming music with most
A2DP enabled cell phones. You
can also stream music directly
from your iPod with the
Scosche tuneSTREAM™ stereo
Bluetooth® transmitter.
(sold separately)

www.SCOSCHE.com

