




REV 8 & REV 10 LED Ring Installation Instructions



Step 1

Remove 4 screws to remove the grill. Then carefully remove the driver. (note, the driver may be tight or hard to remove. If so, use the palm of your hand or a rubber mallet to tap the side of the housing, then remove driver)


On REV 10 Speaker, After removing the 4 screws on the grill, then remove the additional 4 screws on the driver.

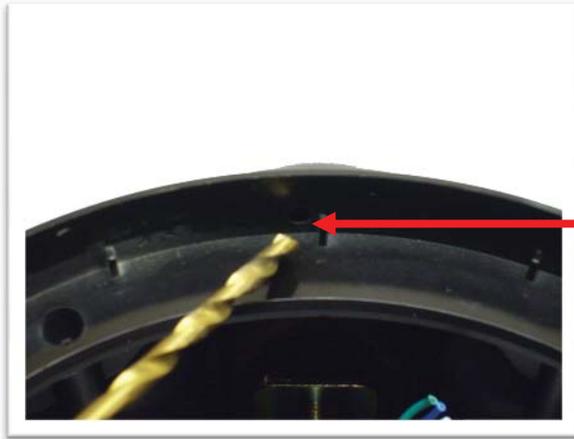

Step 2

Locate the top of the baffle.


Using a 1/4" Drill Bit drill a hole through the top of the front baffle.

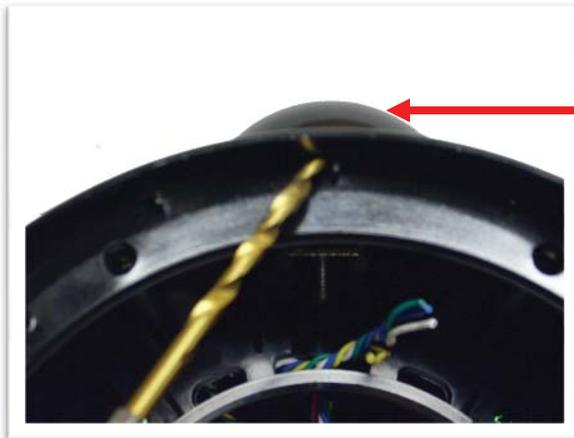

NOTE:

Be Very Careful !!!!

Do Not Drill Through Top Hump Of Housing !!!!

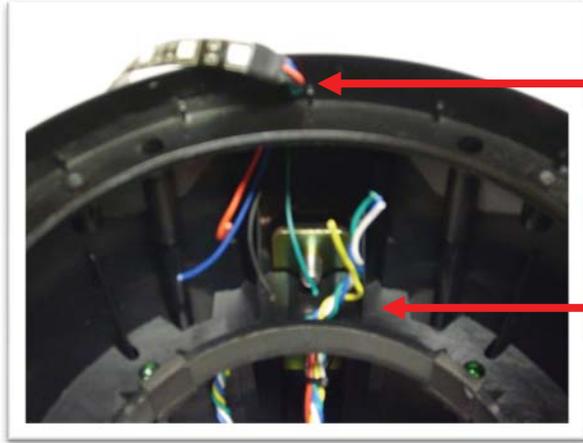

Step 3

Insert LED wires through hole and connect to wires inside housing.

NOTE: Pull LED Wires through support ring inside hosing. Wires must be routed through this support so the driver will not pinch the wires



Step 4

Lay the LED strip off to the side of the hosing.

Re-Install The Driver Back In The Housing Carefully Re-Connecting The Speaker Wires.



Step 5

Peel Up One Corner Of The Strip & Pull Up And Out Pressing The Led To The Housing As You Make Your Way Around.



Step 6

Apply a small amount of silicone to seal the hole where the wires come through.

LED strip should now be in place



Step 7

Align LED ring with holes through speaker into housing.

On REV 10 Speaker, screw 4 screws back into speaker, then place ring on top of speaker. Use the 4 screws that came out, 12, 3, 6 & 9 o'clock positions



Step 8

Re-Install Grill On Top Of Speaker Using The Longer Screws That Came In The Kit