



PRODUCT FEATURES:

- The AUX-BM4 will enable the Auxiliary Audio Input on the OEM navigation radio menu.

PARTS INCLUDED:



AUX-BM4 OBD Coder



Audio Input Cable


INSTALLATION INSTRUCTIONS:

1. Locate OBD-port and remove cover (commonly located under the dashboard on the driver side).
2. Turn ignition switch to ACC.
3. Wait until the navigation has booted.
4. Plug coder into OBD-port.
5. The navigation will re-boot.
6. When the navigation startup-screen shows, remove coder from OBD-port.
7. Your radio's Auxiliary Audio input feature is now enabled.

To remove the Auxiliary Audio feature from the navigation's menu repeat steps 1-6. After the first use on a vehicle, the coder AUX-BM4 is personalized to this vehicle. On this vehicle the enabling and removing the Audio-AUX feature can be repeated without limit.

The AUX-cable must be connected into the female Quadlock connector of the vehicle harness on the back of the radio (receiver under the AC vents).

- Quadlock connector, chamber B
- Pin 2 • Audio (+) left (white)
 - Pin 7 • Audio (+) right (red)
 - Pin 8 • Audio (-) ground (black)

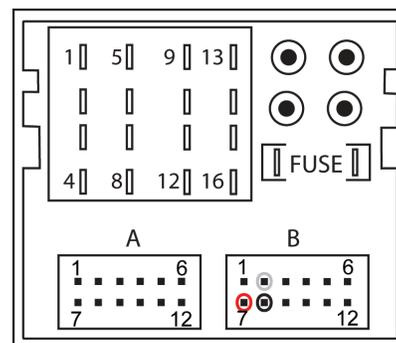

OPERATION:

1. Activating the Auxiliary Audio Input feature on the radio will create an AUX tab on the source drop down menu.
2. Plug in your external audio source, ie. iPod, MP3 player, DVD player to the Aux input cable.
3. Using the controller on the center console, go to the source menu and click on the AUX tab.
4. Audio should be heard on the factory sound system.

VEHICLE APPLICATIONS:

1 Series

2007-2011 (E87)
2007-2011 (E81)
2007-Aug 2013 (E82)
2007-Jun 2014 (E88)

3 Series

2007-2011 (E90)
200-2011 (E91) Wagon
2007-2012 (E92) Coupe
2007-2013 (E93) Convertible

5 Series

2007-2010 (E60/E61)
X6
2008-2012 (E71)

6 Series

2007-2010 (E63/E64)

X5

2007-2013 (E70)

SYSTEM COMPATIBILITY:

BMW vehicles with 10 pin LVDS (CCC, M-ASK, Champ). Professional with 8.8" or Business with 6.5" screen navigation systems.

