


## **PRODUCT FEATURES:**

- Universal Lip mount with screws.
- Selectable Parking Guide Line ON or OFF.
- Can be used as a Rear View or Front View camera.

## **PARTS INCLUDED:**

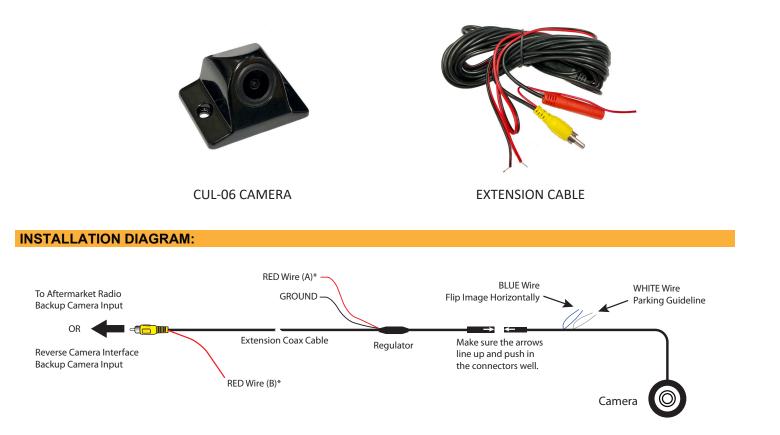

**\*NOTE:** To power the camera, use RED Wire A or B. If tapping power from the radio or RVC Interface, make sure to insulate RED Wire A to avoid it from shorting. If you will be tapping power from the reverse light +12V, insulate RED Wire B to avoid it from shorting. With either connection the Black GROUND wire needs to be connected to a solid chassis ground. For vehicles with manual transmission, we recommend tapping +12V power from the reverse light.

WHITE Wire: Connect to show parking guide line. Disconnect to remove. Insulate with tape to avoid from shorting.BLUE Wire: Connect to use as reverse camera. Disconnect to flip image horizontally to use as front facing camera.Note: Cycle the camera power after connecting or disconnecting the control wires.



Crux Interfacing Solutions • 6860 Canby Ave., Suite 104, Reseda, CA 91335 phone: (818) 609-9299 • fax: (818) 996-8188 • www.cruxinterfacing.com rev.020419