

DMD Series SPEAKER



Owners Manual

DMD35/DMD42/DMD52/DMD652/DMD653/DMD683/DMD693
DMD69V/DMD65C/DMDTAK

ABOUT THE DIAMOND AUDIO EXPERIENCE

Congratulations, you have just purchased the finest mobile audio products on the market to date. At Diamond Audio, our products represent the latest advances in acoustic technology in sound reproduction for your vehicle. Diamond Audio products are designed, developed, and engineered using the latest innovative materials and components to provide the finest sound reproduction possible. Every Diamond Audio product has been Klippel verified and tested to ensure the best sounding and most reliable product on the market, if installed properly, Diamond Audio products will provide many years of the ultimate listening experience.

Please note that prolonged exposure to sound pressure levels in excess of 100dB can cause permanent hearing loss. Using Diamond Audio products can exceed that level so please exercise restraint in its operation in order to preserve your ability to enjoy its high fidelity sound for many years to come.

Diamond Audio recommends our products be professionally installed by an authorized Diamond Audio dealer to achieve the best possible system recommendation and installation. This will ensure a true Diamond Audio listening experience and sound you would expect from Diamond Audio products. In doing this you will extend your warranty from one year to two years.

Go ahead, Hear the Music

FEATURES

- Unique reinforced polypropylene cone with internal dampening
- 20mm silk dome tweeter with Ferro fluid cooling
- Composite ABS frame design
- External 6dB/octave SQ matched crossover (used on DMD65C)

PARTS LIST

DMD42, DMD52, DMD652, DMD653, DMD683, DMD693, D694, DMD65V, DMD69V

- | | |
|---------------------------|----------------------------------|
| (2) DMD Coaxial Speakers | (2) DV Convertible Speakers |
| (2) Mounting Gaskets | (2) DV Model Specific Crossovers |
| (1) Mounting Hardware Kit | (2) Mounting Gaskets |
| | (1) Mounting Hardware Kit |
| | (2) DMD tweeters |

DMDTAK, DMD65C, DMD365C


- (2) DMD Component Speakers (except DMDTAK)
- (2) DMD Component Tweeters
- (2) DMD Model Specific Crossovers
- (2) Mounting Gaskets
- (1) Mounting Hardware Kit

DMD35

- (2) DMD Component Speakers
- (2) Mounting Gaskets
- (1) Mounting Hardware Kit

TWEETER CONFIGURATION (DMD65V and DMD69V Optional)

You have the option of configuring your speakers as a coaxial system (tweeter attached) or a component system (tweeter separate). If your choice is to use as a coax then you will need to attach the tweeter to the midrange. Locate the supplied tweeter post support and attach the tweeter as show. Remove the rubber boot from the midrange; guide the tweeter wires down through the middle of the midrange. Guide the tweeter wires so that they lay in the groove of the inside of the rubber boot as it is replaced. Attach wires to the proper terminals.




MID-BASS SPEAKER MOUNTING




MIDRANGE MOUNTING

Determine a location in the door that will accept the size of your new speaker. Remove the door panel from the door and check for clearance in the intended speaker location while operating window all the way up and down. Avoid cutting any structural metal to mount the speakers or to accommodate additional depth. If depth or a flat surface mount are an issue, please seek the skills of a professional installation technician.

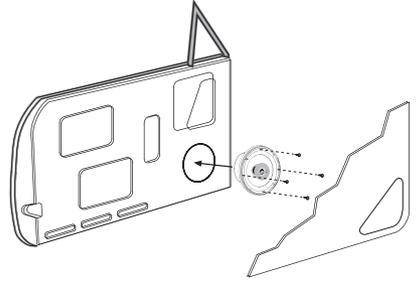


If you are mounting the speakers in the rear of the vehicle, there are often two options for achieving a good mount. Some speakers mount from the top side (from the interior) while other applications have the speakers mounted from the bottom side (from the trunk). In either case, a flat mounting surface and a good seal are still extremely important.

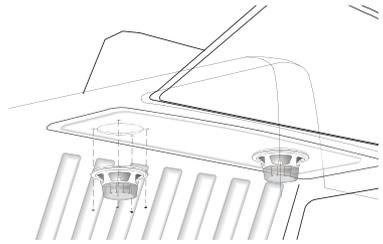

TWEETER MOUNTING


When flush mounting tweeters, make sure the desired location can accommodate the hole size and depth required. Mount the cup using provided hardware. Mount surface cup at desired angle with provided screws in tweeter mounting kit. Route speaker wires through tweeter cup, connect tweeter to wires, and snap tweeter into cup by aligning the notches.

Mounting Hole size: 1.36" (34.5mm) Dia.




SYSTEM CONNECTION

DMD65C

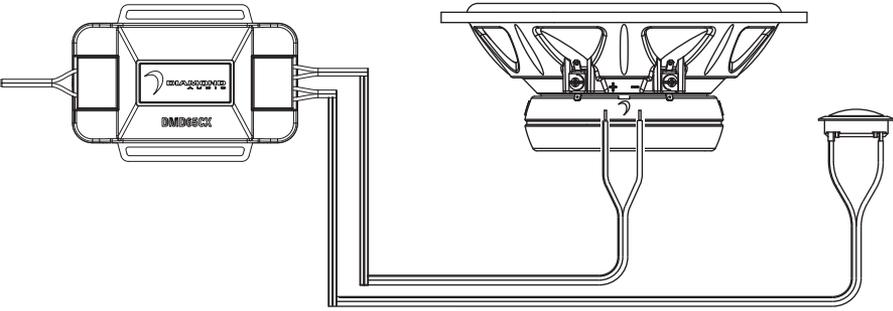

PHYSICAL DIMENSIONS

Dimension	Unit	DMD35	DMD42	DMD52	DMD652 DMD653	DMD683	DMD693/DMD694 DMD69V	DMD65C	DMD65V	DMD365C	
										6.5"	3.5"
Total Diameter (A)	in. mm	3.43 87.0	4.33 110.0	5.57 142.0	6.51 165.5	8.65 x 5.53 219.8 x 140.6	9.20 x 6.40 233.9 x 162.8	6.51 165.5	6.51 165.5	6.51 165.5	3.43 87.0
Mounting Diameter (B)	in. mm	2.81 71.3	3.88 98.6	4.62 117.3	5.53 140.6	6.92 x 4.95 176.0 x 125.8	8.46 x 5.79 215 x 147.1	5.53 140.6	5.53 140.6	5.53 140.6	2.81 71.3
Screw Hole Dia. (C)	in. mm	3.15 80.0	4.63 117.5	5.23 133.0	6.14 156.0	8.03 x 4.98 204.0 x 126.7	6.58 x 4.71 167.2 x 119.7	6.14 156.0	6.14 156.0	6.14 156.0	3.15 80.0
Mounting Depth (D)	in. mm	1.56 39.7	1.82 46.2	2.10 53.3	2.26 57.5	2.18 55.6	2.75 70.0	2.26 57.5	2.26 57.5	2.26 57.5	1.56 39.7
Magnet Diameter (E)	in. mm	2.58 65.5	2.82 71.5	3.11 79.0	3.43 87.0	3.11 79.0	4.19 106.4	3.43 87.0	3.43 87.0	3.43 87.0	2.58 65.5
Max Power	Watt	40	60	80	100	80	140	100	100	120	
Sensitivity	dB	84	84	86	87	86	86	87	87	87	
Freq. Response	Hz	130-8k	83-20k	70-20k	69-20k	67-20k	60-20k	79-20k	69-20k	69-20k	

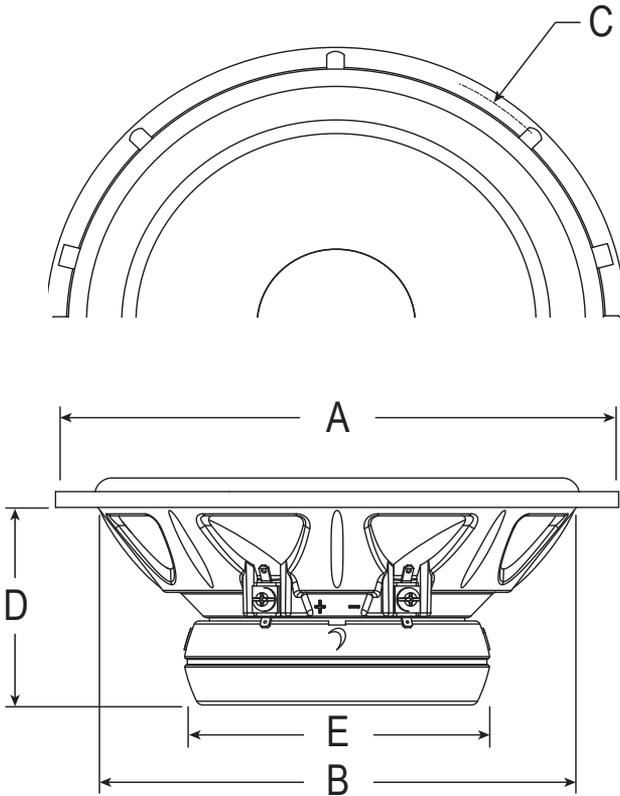

LIMITED SPEAKER WARRANTY STATEMENT

Diamond Audio Technologies, (CV & DA HOLDINGS INC.) warrants this product to be free from defects in material and workmanship for a period of one (1) year from the original date of purchase provided it was purchased from an authorized DAT retailer within the United States. Product warranty period starts at date of purchase or one year past manufacture date whichever is first. However, upon purchase, completion of the online registration and installation by an authorized DAT dealer your warranty period will be extended to two (2) years. This warranty extension offer will only be recognized upon completion of the online registration of your product within 30 days of the date of purchase.

THIS WARRANTY IS NOT TRANSFERABLE AND APPLIES ONLY TO THE ORIGINAL PURCHASER OF THIS PRODUCT IN ITS ORIGINAL INSTALLATION. Original purchaser must reside in the United States and be able to provide proof of purchase and installation with the sales receipt and completion of online registration from the authorized DAT retailer that sold and installed the product.

Should a manufacturing defect occur during above said warranty period, DAT will replace or repair the defective product with a product of the same or equivalent value and performance.

Damage or failure caused by any of the following is not covered under this warranty policy: negligence, improper use, abuse, product modification, unauthorized repair attempts, accident, acts of God, misrepresentations by DAT retailers, and improper/inadequate packaging during return shipping.

Warranty is void if serial numbers have been removed, altered or defaced.

HOW TO OBTAIN WARRANTY SERVICE

In the event a DAT product should require service, you should visit the authorized DAT retailer you purchased the product from and they can expedite your claim. All claims must fall into the guidelines listed above and be accompanied by a copy of the original sales and installation receipt from that authorized DAT retailer.

Product returned for warranty service must be freight-prepaid, properly packaged and clearly marked with the Return Authorization (RA) number issued by DAT. Any product returned to DAT that is improperly packaged, does not have a RA number clearly marked on the package, or never received a RA number may be refused upon delivery. DAT does not assume responsibility for lost or misdirected product.

Repair or replacement under this warranty is the exclusive remedy of the consumer. DAT shall not be liable for any incidental or consequential damages for breach of any expressed or implied warranty on this product. Some states do not allow the exclusion or limitation of incidental or consequential damages, or allow limitations on how long an implied warranty lasts, so the above limitations or exclusions may not apply to you. This warranty gives you specific legal rights and you may also have other rights that may vary from state to state.

Customers outside the United States should contact their local sales office to obtain information on pricing, exchange unit availability, instructions, service and warranty/non-warranty replacement or repair.

Diamond Audio Technologies

1225 E.7th ST
LOS ANGELES, CA 90021
Tel: 213-261-4161
Fax: 213-947-4767
Web: diamondaudio.com

Service/Tech Support:

213-261-4161
Tech Support Email
techsupport@diamondaudio.com



DIAMOND
A U D I O

(a division of CV & DA Holdings, Inc.)
1225 E. 7th Street
Los Angeles, CA. 90021

www.DiamondAudio.com