



Technical Support If you need technical support with your BOSS AUDIO product or have questions about its use, please contact us: 800.999.1236 www.BossAudio.com

Due to ongoing product development, specifications are subject to change without notice.

BE10D_1216

Congratulations on your purchase of the BOSS AUDIO Subwoofer. BOSS AUDIO takes great pride in producing products that look great, sound great, and stand up to the daily rigors applied by audio enthusiasts around the world.









BE10D 10" Subwoofer

Dual 4 Ω Voice Coils

800 W Peak Power Handling

Rubber Surround




Enclosures

The BE10D will work in both sealed and ported enclosures.


Below you will find the dimensions to make the enclosure to suit the subwoofers needs, it has been designed for maximum output while retaining great sound quality.

The dimensions have already accounted for the volume displacement of the subwoofer, and using 3/4" (19mm) MDF. All dimensions are external.

Enclosure Dimensions



Sealed Dimensions: Height (H) : 12" (305 mm) Depth (D) : 10" (254 mm) Width (W) : 15" (381 mm) Cutout Diameter: 9-1/4" (235 mm)




Ported Dimensions: Height (H) : 12" (305 mm) Depth (D) : 10" (254 mm) Width (W) : 18" (457 mm) Port Diameter : 3.5" (89 mm) Port Length : 10" (254 mm) Tuning Freq : 45 Hz

ELITE


ELITE



Wiring your Subwoofer

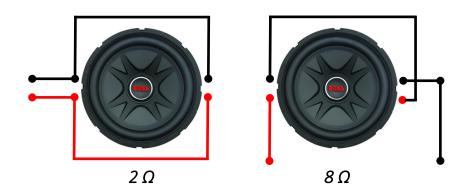

Multiple Subwoofers

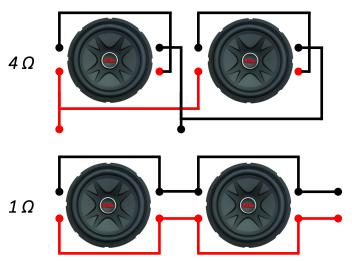





ELITE

4



Product Specifications

Impedance	Dual 4 Ω
Resonant Frequency	44 Hz
Qts	0.48
Qms	2.37
Qes	0.60
Vas	1.01 ft³ (28.7 liters)
Xmax	9 mm
Sensitivity (1 W/ 1 m)	88 dB
Peak Power Handling	800 W
Mounting Depth	4-5/8″ (118 mm)
Cutout Diameter	9-1/4" (235 mm)