



Source Unit

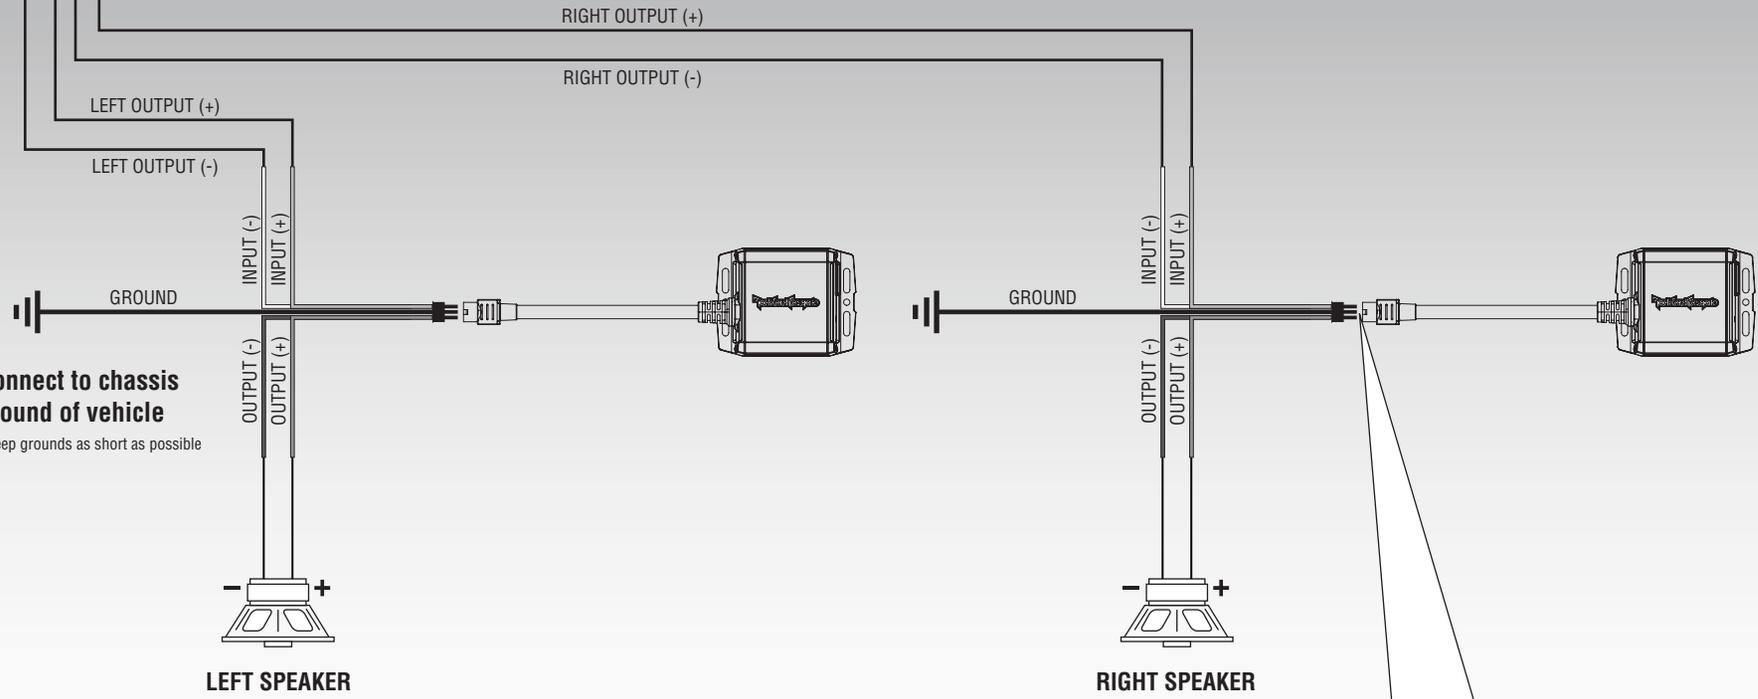

Connect to chassis ground of vehicle


*Keep grounds as short as possible

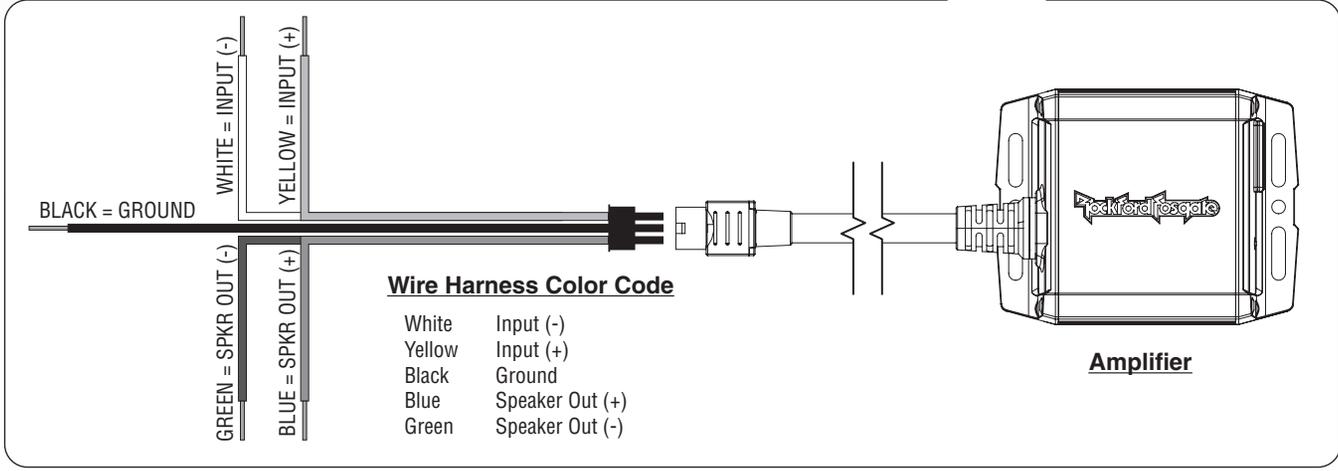

LED - Power / Protect

Power LED illuminates blue when the unit is turned on.

Protect LED illuminates red if a short circuit or too low of an impedance is detected at the speaker connections. The amplifier will automatically shut down if this occurs.

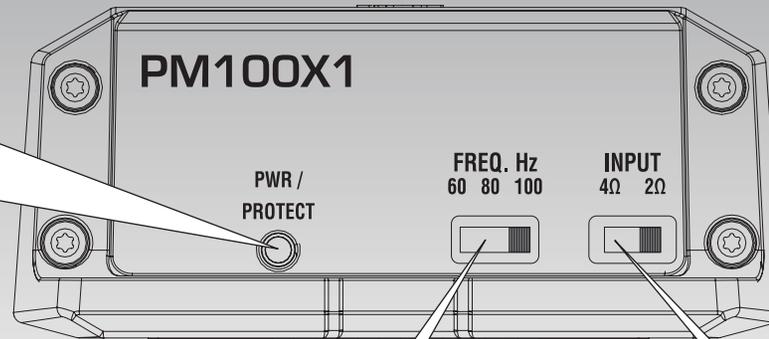


Crossover - 60/80/100 Hz

Selectable 12dB/Oct HP Butterworth Crossover at 60, 80, and 100 Hz.

Input - 2/4 ohm

Selectable input switch for impedance capability of the source unit (radio).

CAUTION: Selecting 2 ohm may damage the radio if it's not 2 ohm stable.

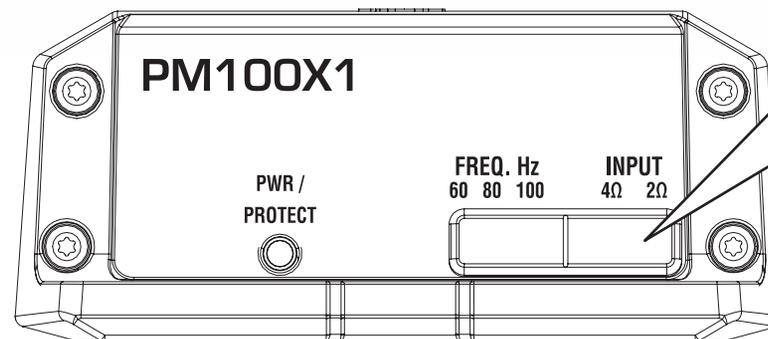

IP67 - Water Resistant

The rubber switch cover needs to be installed to prevent water and dirt intrusion into the amplifier. Failure to install the covers will leave the amplifier susceptible to damage from moisture and dirt.

